Power range 1500 rpm 6-9.5 kWm (engine gross power)
Power range 1800 rpm 5.1-14 kWm (engine gross power)

Emissions EU Stage V, U.S. EPA Tier 4 Final

Certified against the requirements of EU Stage V (Regulation 2016/1628)

The Perkins® 400 Series engine family continues to set new standards in the compact engine market. Developed alongside customers to fulfil their needs in the generator set market, they have been designed to comply with stringent emissions regulations for EU and USA.



The 403 Product range offers a highly compact Perkins electro units and electropaKs to provide robust 3 cylinder diesel engines designed to provide economic and durable operation for prime power applications, hitting the key power nodes required by the power generation industry.

Features and Benefits

- Maximised productivity by achieving key power nodes with clean rapid starting in all conditions whilst delivering impressive steady state and transient response. Options between Stage V certified products for the EU mobile genset market and Tier 4 Final certified products for the US mobile genset market ensures flexibility for our customers tailored to their needs.
- The 400 Series offers a range of mechanical engines that are designed to be compact, simple to run under all conditions and easy to maintain. Some features include spin-on filters and cassette-type fuel injection pumps for ease of integration and service accessibility.
- The 400 Series mechanical engine range offers optimised fuel consumption and low oil consumption whilst meeting the Stage V and Tier 4 Final emissions standards; all delivered from a reliable mechanical engine to minimise cost of ownership.

- Perkins engines are designed and developed with our customer in mind. Keeping service cost to a minimum ensures **low periodic running costs**.
 This is achieved through 500 hour service intervals for oil and fuel as standard under all operating conditions.
- The long productive life of our products is supported through the Perkins 12 month warranty as standard for prime power applications, and the 1500 hour or two year emissions warranty. For further peace of mind, there is also the option to purchase Extended Service Contracts through Perkins Platinum Protection. Contact your local distributor or visit www.perkins.com/en_ GB/aftermarket/perkins-platinum-protection.
- Perkins takes pride in manufacturing all products globally to the same **high quality standard**. All of our products are manufactured in world class facilities to ensure highest quality for your peace of mind.

Power range 1500 rpmPower range 1800 rpm5.1-14 kWm (engine gross power)

Emissions EU Stage V, U.S. EPA Tier 4 Final

Certified against the requirements of EU Stage V (Regulation 2016/1628)

	Model						
	403J-07G	403F-07G	403J-11G	403F-11G	403F-15G		
Emissions certification	Stage V	Tier 4 Final	Stage V	Tier 4 Final	Tier 4 Final		
Configuration	Electr	o unit	Electr	ropaK	ElectropaK		
Cylinders	3	3	3		3		
Displacement, litres (in ³)	0.7 (4	46.5)	1.1 (69) 1.		1.5 (91)		
Aspiration			Naturally aspirated 77 x 81 84 x 90				
Bore and stroke, mm (in)	67 x 72 (2.6 x 2.8)		77 x 81 (3.0 x 3.2)		84 x 90 (3.3 x 3.5)		
Combustion system		Mec	hanical indirect inje	ction			
Compression ratio	23.	23.5:1 23:1		22.5:1			
Exhaust aftertreatment			N/A				
Rotation (viewed from flywheel)	Anti-clockwise						
Total lubricating oil capacity, litres (US gal)	3.1 (0.8)		4.9 (1.3)		6.0 (1.6)		
Cooling system			Watercooled				
Total coolant capacity, litres (US gal)	2.6	(0.7)	5.2	(1.4)	6.0 (1.6)		

Technical Information

Model Speed	Chood		Engine Power		Typical Generator		Prime Fuel Consumption			
	Type of Operation	Gross	Net	Output* (Net)		110%	100%	75%	50%	
	rpm	Operation	kWm (hp)	kWm (hp)	kVA	kWe	g/kWh	g/kWh	g/kWh	g/kWh
403J-07G 1500	Prime	6.0 (8.0)	5.4 (7.2)	5.8	4.7	254	253	274	377	
	Standby	6.6 (8.9)	5.9 (7.9)	6.4	5.1					
403F-07G 1800	Prime	5.1 (6.8)	5.0 (6.7)	5.4	4.3	-	259	-	-	
	Standby	5.6 (7.5)	5.5 (7.4)	5.9	4.7					
403J-11G 1500	Prime	8.6 (11.5)	8.4 (11.3)	9.0	7.2	- 261	252	258	286	
	Standby	9.5 (12.7)	9.3 (12.5)	10.0	8.0					
403F-11G 1800	Prime	8.9 (11.9)	8.5 (11.4)	11.2	9.0	- 252	255	267	308	
	Standby	9.8 (13.1)	9.4 (12.6)	12.4	9.9					
403F-15G 1800	Prime	12.6 (16.9)	12.4 (16.6)	13.5	10.8	- 258	261	275	320	
	Standby	14 (18.8)	13.8 (18.5)	15.1	12.1					

^{*}Generator powers are typical and based on typical alternator efficiencies and a power factor ($\cos \theta$) or 0.8.



Power range 1500 rpm 6-9.5 kWm (engine gross power)
Power range 1800 rpm 5.1-14 kWm (engine gross power)

Emissions EU Stage V, U.S. EPA Tier 4 Final

Certified against the requirements of EU Stage V (Regulation 2016/1628)

Standard Equipment

	Model					
	403J-07G	403F-07G	403J-11G	403F-11G	403F-15G	
Electro unit or electropaK	Electro unit	Electro unit	ElectropaK	ElectropaK	ElectropaK	
Radiator fitted	*	×	✓	✓	✓	
Fuel filter, engine mounted	✓	✓	✓	✓	✓	
Water separator	N/A	N/A	✓	✓	✓	
Fuel priming pump (manual/electric)	Manual	Manual	Both available	Both available	Both available	
Fuel cooler (not required for most installations)	N/A	N/A	N/A	N/A	N/A	
Air filter, engine mounted	✓	✓	✓	✓	✓	
Engine ECM, engine mounted	N/A	N/A	N/A	N/A	N/A	
Wiring harness to ECM	N/A	N/A	N/A	N/A	N/A	
Wiring harness (all connectors to single customer interface)	N/A	N/A	N/A	N/A	N/A	
Starter motor	✓	✓	✓	✓	✓	
Battery charging alternator	✓	✓	✓	✓	✓	
Flywheel housing	✓	✓	✓	✓	✓	
Flywheel	✓	✓	✓	✓	✓	
Fan	✓	✓	✓	✓	✓	
Fan guard	*	×	✓	✓	✓	
Temperature and oil pressure for automatic stop/alarm configurable	✓	✓	√	✓	✓	





Power range 1500 rpmPower range 1800 rpm5.1-14 kWm (engine gross power)

Emissions EU Stage V, U.S. EPA Tier 4 Final

Certified against the requirements of EU Stage V (Regulation 2016/1628)

Engine Package Weights and Dimensions

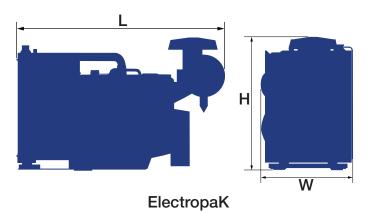

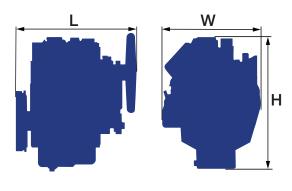

Electro Unit

	Model						
	403J-07G	403F-07G	403J-11G	403F-11G	403F-15G		
Configuration	Electro unit		Electro	ElectropaK			
Dimensions, H x L x W, mm (in)	528 x 509 x 376 (20.8 x 20 x 14.8)		700 x 776 x 449 (27.6 x 30.6 x 17.7)		793 x 805 x 473 (31.2 x 31.7 x18.6)		
Dry weight, kg (lb)	71 (157)	129 (284)		197 (434)		

Prime power: Power available at variable load in lieu of a main power network. Overload of 10% is permitted for 1 hour in every 12 hours of operation.

Standby (maximum): Power available at variable load in the event of a main power network failure. No overload is permitted.

